


# dupré

# ZIRCON WASH

## L546D

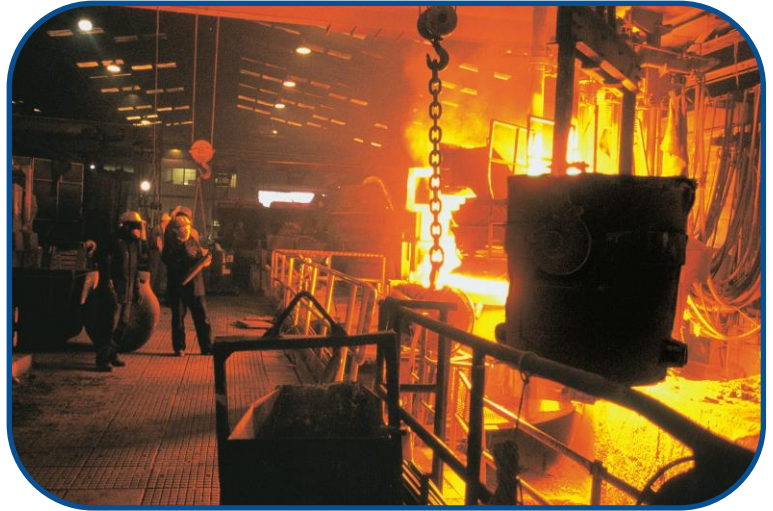

### DESCRIPTION

ZIRCON WASH (L546D) is a refractory wash, supplied as a dry powder which requires mixing with water before use.

### MIXING INSTRUCTIONS

The amount of water needed is dependent on the method of application the thickness required per application and personal preference.

As an approximate guide 1 kg of Zircon Wash will need approx. 1 litre of water.

Mixing can be achieved readily by hand, but some means of mechanical assistance is advised for complete dispersion.

The wash can readily be applied by brushing or spraying.

### CLASSIFICATION

It is not advisable to use ZIRCON WASH (L546D) beyond a maximum service temperature of 1600°C (=MST).

### TYPICAL PROPERTIES

<b>+75 µm Content</b>	< 1%
<b>Specific Gravity</b>	4.25
<b>ZrO<sub>2</sub></b>	53 %
<b>SiO<sub>2</sub></b>	36 %
<b>Al<sub>2</sub>O<sub>3</sub></b>	7 %

### PACKAGING AND STORAGE

- Zircon Wash L546D is supplied in 25 kg paper sacks.
- Use stock in rotation and within 12 months of manufacture for best results.
- Reseal packaging when not in use to prevent contamination and moisture pickup. Moisture may cause the product to 'cake' and require a longer mixing time.
- Refer to the latest SDS for more information.



[www.dupreminerals.com](http://www.dupreminerals.com)

*Information presented above is given in good faith as accurate and reliable but is not to be taken as a guarantee. The figures provided are intended to be a guide to expected average values and should not be interpreted as a specification. Any potential applications referred to are not to be construed as recommendations. It is the responsibility of the user to determine suitability for any specific purpose.*

ISSUE 050919

Dupré Minerals Limited, Spencroft Road, Newcastle-under-Lyme, Staffordshire, ST5 9JE

Telephone +44 (0) 1782 383000 Fax +44 1782 383101 Email [info@dupreminerals.com](mailto:info@dupreminerals.com)